



# Steps to GREAT Service

---

1. Call our office at 770-267-2505 to apply for service.

2. Ask for customer service. They'll set up your account.

We'll need your name, company name, address, subdivision, lot number, street address, phone number and SSN/federal tax ID number.

3. Request the type of temporary service.

- **Standard**—specific to each house. The meter on the temporary pole will be moved to the house when permanent service is requested.
- **Floating**—serves multiple sites. A different meter will be installed on the finished house for permanent service.


4. Ask to set up an appointment with a staking technician at your job site.

The staking technician will look at your job and make suggestions to get your project the best possible electrical service.


## Other Helps

- Clear a straight path from the transformer to the meter base on the house.
- Have your electrician mount the meter base on the transformer or stub out side of the house before doing the rest of the wiring.
- Don't put building materials in the electric service path (the path between the transformer and the meter base).
- Call us when the meter base is set and grading is finished. Mark all underground lines (especially septic tank). **Then we can install the underground cable before you landscape!**
- If you use a floating temporary, call us to disconnect it after all your houses are finished.


## Underground Temporary

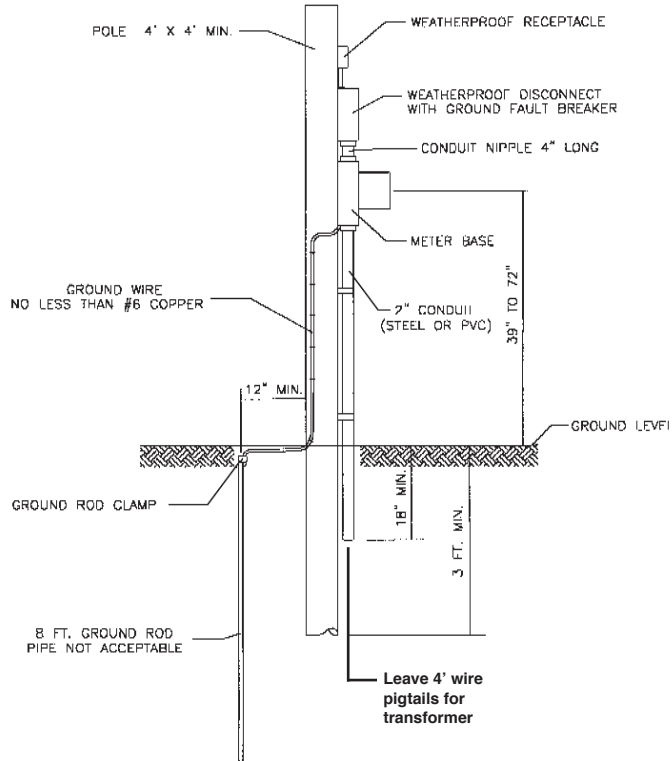

## Overhead Temporary

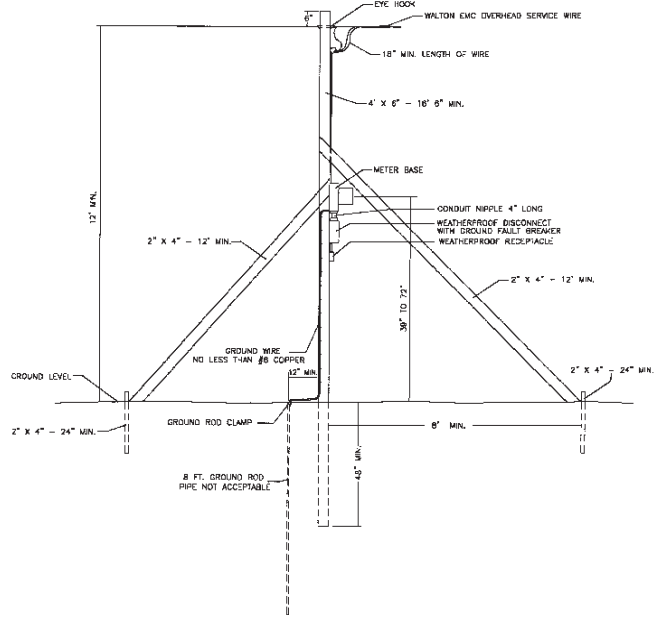

## 200 Amp Underground

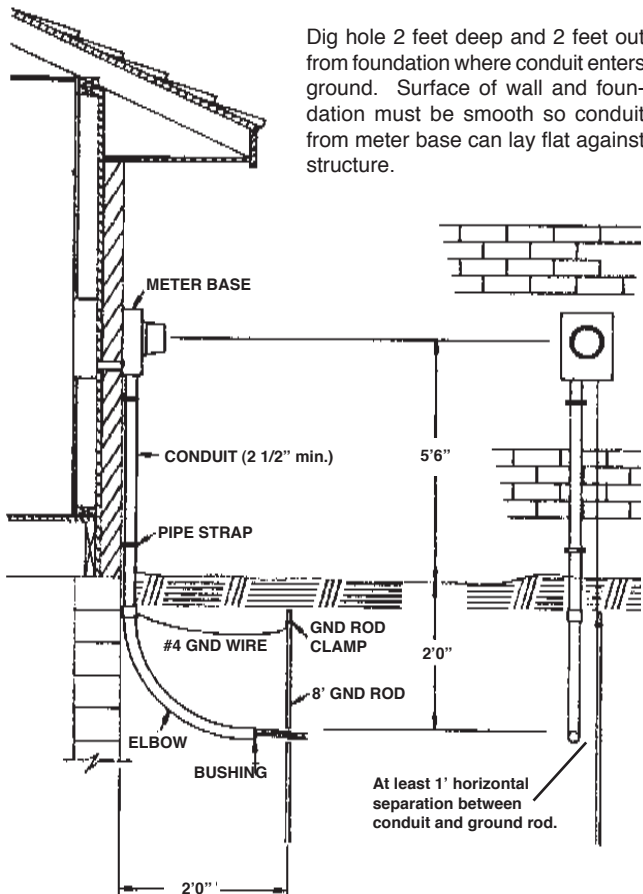

Dig hole 2 feet deep and 2 feet out from foundation where conduit enters ground. Surface of wall and foundation must be smooth so conduit from meter base can lay flat against structure.

Meter base to be installed by consumer or electrician. Eight foot ground rod must be driven in undisturbed soil. Local code authorities may have requirements in addition to those listed here.

## 400 Amp Underground

Disconnects may be built into the meter base. Consumer is responsible for providing lugs.

