Construction Features

- Energy Saving Pipe Wrap Kit reduces heat loss through plumbing lines.
- Temperature and Pressure Relief Valve factory installed.
- Water Tight Grommets keep out overhead moisture and condensation.
- Seamless Molded Non-metallic Inner Tank can't rust or corrode.
- **Fill Tube** high temperature material to withstand thermal storage and other high temperature applications.
- High-tech Heating Elements upper element fused to protect tank against "dry fire." Bottom element is low watt, stainless alloy for long life (only one element on 20 gallon model).
- Polyethylene Outer Jacket resists dents and scratches during transit, installation and beyond.
- Envirofoam®- a great energy saver and friendly to the ozone layer—it's made without CFC's and HCFC's.
- Fiberglass Tank has unmatched strength.
- Recessed Drain Valve protected from damage.


YOUR MARATHON® IS WARRANTED NOT TO LEAK FOR AS LONG AS YOU OWN YOUR HOME*...

The Marathon offers this no-leak promise because of its superior, non-metallic PermaGuard tank construction...A seamless, blow-molded polybutylene inner tank with a filament-wound fiberglass outer tank for maximum strength.

Superior performance, high-efficiency and low operating cost... for a lifetime*!

* See Residential Warranty Information Brochure at your dealer for complete warranty information. Warranty coverage is different from multi-family and commercial applications.

THESE UNITS ARE DESIGNED TO MEET OR EXCEED A.N.S.I. (AMERICAN NATIONAL STANDARDS INSTITUTE) AND HAVE BEEN TESTED ACCORDING TO D.O.E. TEST PROCEDURES AND MEET OR EXCEED THE ENERGY EFFICIENCY REQUIREMENTS OF NAECA, ASHRAE STANDARD 90, BOCA CODE AND ALL STATE ENERGY EFFICIENCY PERFORMANCE CRITERIA FOR ENERGY CONSUMING APPLIANCES.

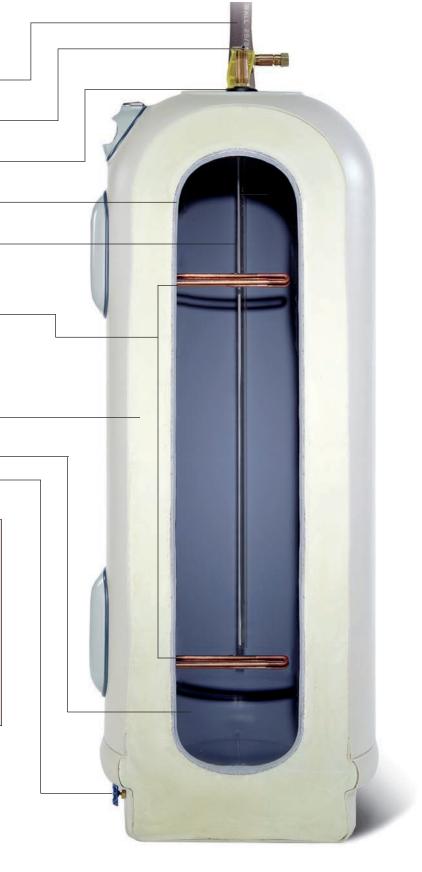

"In keeping with our policy of continuous progress and product improvement, we reserve the right to make changes without notice."



Call Walton EMC Today 770-267-2505 Read more at our website: waltonemc.com



P/N 231690 © Copyright 06/01 Revised 11/15

ONLY **MARATHON® OFFERS THE** ONE THING YOU'RE **LOOKING FOR IN A** WATER HEATER.

EVERYTHING.



Take a closer look. And see for yourself.

One thing you'll notice right away is the tough but lightweight outer shell. And you're right, that is a new, innovative shape for a water heater. Some things you simply can't see because they're inside, like the heating elements and the inner water tank that will never rust, corrode or leak. And other things won't become apparent until you've owned a Marathon for a while—like the fact that it is incredibly energy efficient.

In fact, Marathon water heaters are so well made, they come with a Lifetime No-Leak warranty. A small detail many other water heaters simply don't have.

So if you expect your water heater to last a long time, make sure it comes with exactly what you expect.

Everything.

Available in 40, 50, 85 and 105 gallon models

- Lifetime Limited Tank Warranty
- 6 Year Limited Parts Warranty

LONG LIFE

- The seamless, blow-molded polybutylene tank is impervious to rust and corrosion!
- Multiple layers of filament-wound fiberglass give the tank unmatched strength.
- The tank is designed, built and warranted not to leak "for as long as you own your home."

ENERGY EFFICIENCY

- Envirofoam® insulation is free of ozone depleting CFC's and HCFC's so it saves the planet—and it saves energy.
- Pipe Wrap Energy Kit is included to reduce heat loss from plumbing lines.

DURABLE

- Recessed drain valve is out of the way of brooms and scrubbers.
- Tough molded outer shell resists dents and scratches.
- Bowl-shaped bottom allows more complete sediment draining.

FUNCTIONAL

- Factory installed temperature and pressure relief valve for greater value and security.
- All plastic tank eliminates the need for an anode rod preventing potential odor problems.

Gallon Capacity	Element Wattage	First Hour Rating	Energy Factor	A	Nominal Dimensions B	c	Shipping Weight
40	3800/3800	52 gal.	.95	21.62"	61.50"	65.50"	91 lbs.
50	3800/3800	61 gal.	.95	23.50"	62.75"	66.75"	103 lbs.
50	3800/3800	54 gal.	.95	28.25"	43.25"	47.25"	101 lbs.
85	3800/3800	91 gal.		28.25"	66.25"	70.25"	139 lbs.
105	3800/3800	104 gal.		30.25"	66.75"	70.75"	152 lbs.
	40 50 50 85	Capacity Wattage 40 3800/3800 50 3800/3800 50 3800/3800 85 3800/3800	Copacity Wattage Rating 40 3800/3800 52 gal. 50 3800/3800 61 gal. 50 3800/3800 54 gal. 85 3800/3800 91 gal.	Capacity Wattage Rating Factor 40 3800/3800 52 gal. .95 50 3800/3800 61 gal. .95 50 3800/3800 54 gal. .95 85 3800/3800 91 gal.	Capacity Wattage Rating Factor A 40 3800/3800 52 gal. .95 21.62" 50 3800/3800 61 gal. .95 23.50" 50 3800/3800 54 gal. .95 28.25" 85 3800/3800 91 gal. 28.25"	Capacity Wattage Rating Factor A B 40 3800/3800 52 gal. .95 21.62" 61.50" 50 3800/3800 61 gal. .95 23.50" 62.75" 50 3800/3800 54 gal. .95 28.25" 43.25" 85 3800/3800 91 gal. 28.25" 66.25"	Capacity Wattage Rating Factor A B C 40 3800/3800 52 gal. .95 21.62" 61.50" 65.50" 50 3800/3800 61 gal. .95 23.50" 62.75" 66.75" 50 3800/3800 54 gal. .95 28.25" 43.25" 47.25" 85 3800/3800 91 gal. 28.25" 66.25" 70.25"

Notes: 240 Volt AC single phase, standard Other wattages available by special order, allow 6 to 8 weeks. Maximum test pressure: 300 PSI Maximum working pressure: 150 PSI

